


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		REMOVED SAFETY WIRE NOTCH AND ADDED NEW REVISIONS TABLE. CH'D MATERIAL FROM Ø2 O.D. AND NOTE 1 FROM SAW IN HALF W/ .060-.032 SAW.	6/26/2007	WP	DW
1A		CH'D TITLEBLOCK & REVISION BLOCK. ADDED ENGRAVE NOTE.	1/21/2010	RJC	RW
2	16-0026	CH'D ANGLE DIM WAS 7° IS (6.72°).	2/8/2016	RJC	JAG
3	16-0152	CH'D P/N WAS RBT18803 IS RBT18803-1. -1 CH'D DESCRIPTION WAS BOOT INSTALL & REMOVAL TOOL IS BOOT REMOVAL TOOL; CH'D DIM WAS 1.057 IS 1.00, WAS 1.84 IS 2.000, WAS Ø.807 IS .825, WAS 2.00 IS 2.10, WAS .20 IS .25, WAS (6.72°) IS (7.83°); REMOVED DIM .20 X 45°; ADDED DIM .19 X 45°, R.25, R.06. -3 ADDED TO ASSEMBLY.	9/27/2016	SM	JAG



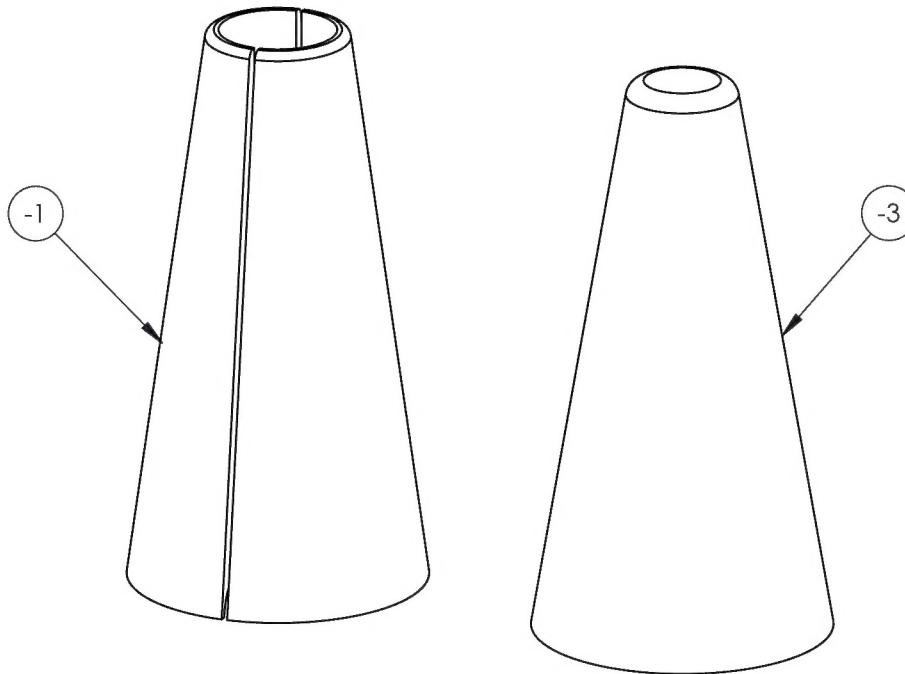


DART AEROSPACE	
TITLE BOOT INSTALL & REMOVAL TOOL	
DWG NO. RBT18803	REV 3
MAT'L REAT TREAT FINISH SPEC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125°
DRAWN BY: MACKOVJAK	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: DUERFELDT	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	269
SCALE 3:4	DATE 9/27/2016
SHEET 1 OF 3	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1 SET	BOOT REMOVAL TOOL	WHITE DELRIN		2
			-3	1	BOOT INSTALL TOOL	WHITE DELRIN		3

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		REMOVED SAFETY WIRE NOTCH AND ADDED NEW REVISIONS TABLE. CH'D MATERIAL FROM Ø2 O.D. AND NOTE 1 FROM SAW IN HALF W/.060-.032 SAW.	6/26/2007	WP	DW
1A		CH'D TITLEBLOCK & REVISION BLOCK, ADDED ENGRAVE NOTE.	1/21/2010	RJC	RW
2	16-0026	CH'D ANGLE DIM WAS 7° IS (6.72°).	2/8/2016	RJC	JAG
3	16-0152	-1 CH'D DESCRIPTION WAS BOOT INSTALL & REMOVAL TOOL IS BOOT REMOVAL TOOL; CH'D DIM WAS 1.057 IS 1.00, WAS 1.84 IS 2.000, WAS Ø.807 IS .825, WAS 2.00 IS 2.10, WAS .20 IS .25, WAS (6.72°) IS (7.83°); REMOVED DIM .20 X 45°; ADDED DIM .19 X 45°, R.25, R.06.	9/28/2016	SM	JAG

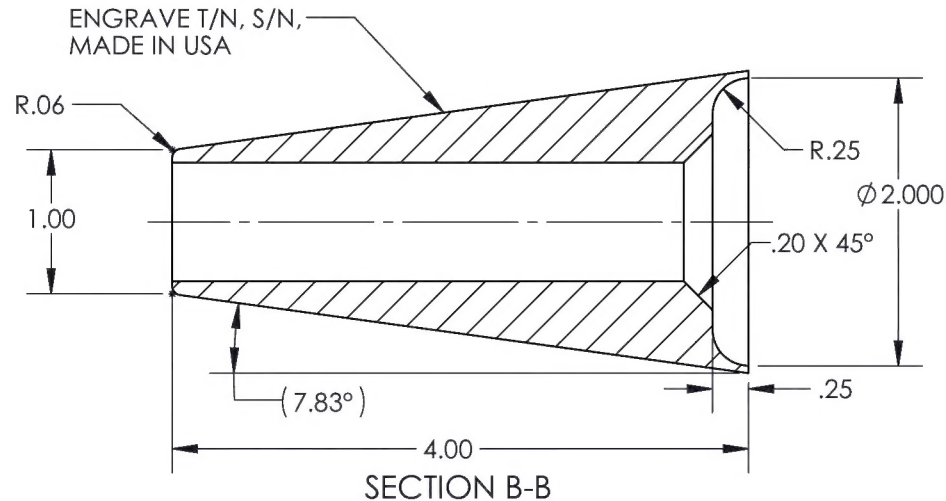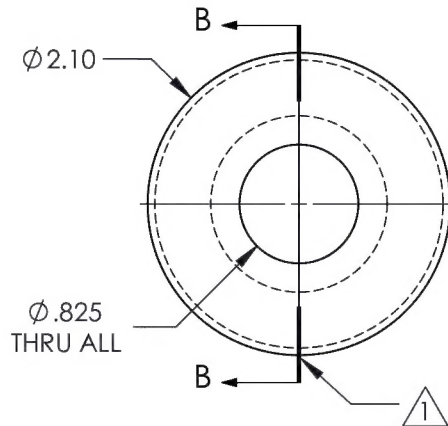

NOTE:



① SAW IN HALF AND MILL BEFORE TURNING.

(-1)
BOOT REMOVAL TOOL


DART AEROSPACE	
TITLE BOOT INSTALL & REMOVAL TOOL	
DWG NO. RBT18803-1	REV 3
MAT'L WHITE DELRIN	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± .5°
	.X ± .1 SURFACES = 125/✓
DRAWN BY: PERRITT	1. BREAK ALL SHARP EDGES
CHECKED: DUERFELDT	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	269
SCALE 3:4	DATE 7/1/2005
	SHEET 2 OF 3

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
3	16-0152	-3 ADDED TO ASSEMBLY.	9/28/2016	SM	JAG

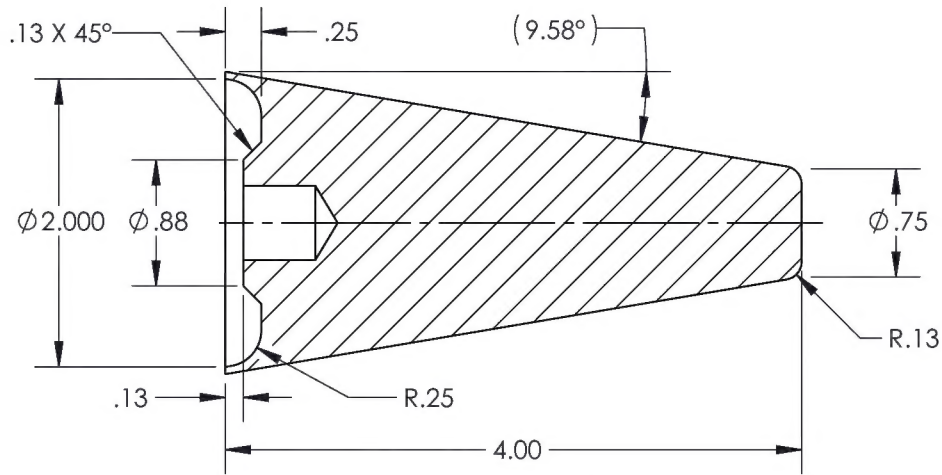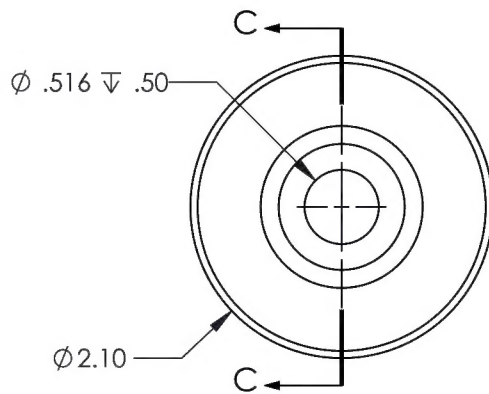

SECTION C-C

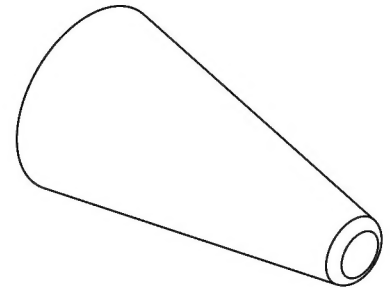

(-3)

BOOT INSTALL TOOL

DART AEROSPACE	
TITLE BOOT INSTALL & REMOVAL TOOL	
DWG NO. RBT18803-3	REV 3
MAT'L WHITE DELRIN	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± .5°
	.X ± .1 SURFACES = 125° ✓
DRAWN BY: MACKOVJAK	1. BREAK ALL SHARP EDGES
CHECKED: DUERFELDT	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
SCALE 3:4	DATE 9/27/2016
	USED ON MODEL 269
	SHEET 3 OF 3